

centiel

continuous power availability



CumulusPower™

Modular UPS 10kW to 3.6MW



SWISS
MADE

www.centiel.com
www.centiel.co.uk



CumulusPower™

CumulusPower™ is a Swiss made 3-phase, online double-conversion and fully decentralized modular Uninterruptible Power Supply.

From **10kW to 3.6MW** CumulusPower™ provides the maximum flexibility to adapt to any application. By eliminating any single point of failure, Adding Distributed Active-redundant technology (DARA™), preventing human error and reducing the time to maintain and repair, CumulusPower™ delivers an industry leading Availability of 9 nines to fulfill the needs of the most critical power applications.

Highest Efficiency

+97.1%

Hot Swappable Modules

Fast Replacement of Intelligent Modules

Proven Reliability

30 years of experience

Distributed Architecture

No Single Point of Failure

Flexibility to Pay as You Grow

Series of frame sizes

Unity Power Factor

kVA = kW

9 Nines Availability

Zero Downtime

Lowest Total Cost of Ownership

Reduced Component Count Simplifies Maintenance

Lowest Total Cost of Ownership

High Efficiency 97.1% (VFI)


With the best in class efficiency of 97.1% in double conversion mode (VFI), CumulusPower™ provides the lowest Total Cost of Ownership and lowest carbon footprint.

Maximum Efficiency Management (MEM)

CumulusPower™ incorporates an Intelligent MEM function which matches the number of modules to the load demand by monitoring the level of optimum energy efficiency.

At low load levels, any modules no longer required to maintain redundancy are placed into Active-Sleep mode, reducing overall energy consumption.

Active-Sleep modules are instantly online when load increases, maintaining maximum availability at all times.

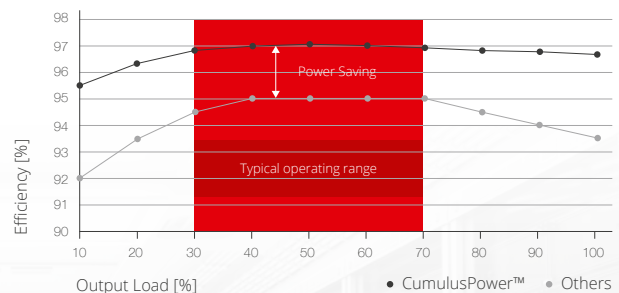

>10 years DC capacitor life +“plug-and-play” AC capacitors

- Reduces TCO
- Simplifies maintenance
- Lower cost in spare parts(MTTR) and simplifies routine maintenance.

Serviceability


Modular design allows fast replacement of Intelligent Modules, reducing Mean Time to Repair (MTTR), maximising availability and reducing costs.



The Technology

Distributed Active-Redundant Architecture (DARA™)

The architecture of the CumulusPower™ was designed to respond to the highest availability requirements, through the implementation of the system's distributed decision-making in an event of a critical failure, and a correct management of the load sharing. The communication between the Intelligent Modules is accomplished by means of a fully redundant TripleMode™ communication BUS.

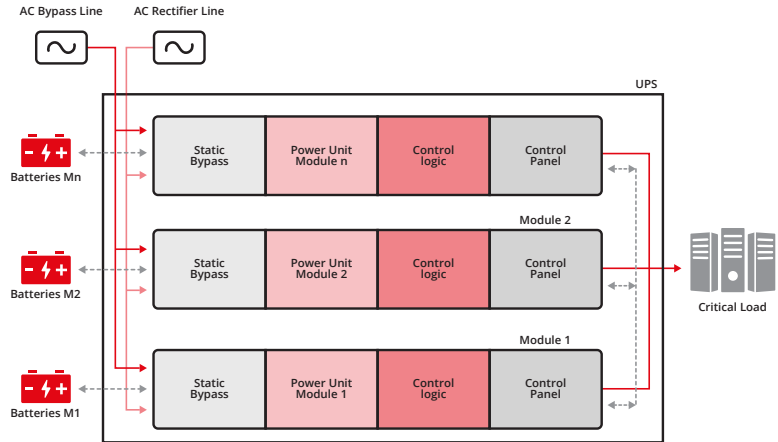

IM 10/20/25



IM 50/60



Flexible Intelligent Module (IM)

Each module is a complete UPS. Thanks to Centiel's long experience in module-design, the CumulusPower™ Intelligent Modules are equipped with three independent power converters, one static bypass, all hardware and all software (intelligence and monitoring) functions, making them fully independent and capable of safely isolating from the multi-module system whenever an internal fault occurs.

CumulusPower™ IM 10/20/25 UPS with internal batteries

From 10kW
to 100kW



Modell	CP050-I080-A1	CP050-I240-A0	CP100-I320-B0
Module Type	2 x IM10/IM20/IM25	2 x IM10/IM20/IM25	4 x IM10/IM20/IM25
Max Power	50kW	50kW	100kW
Internal Batteries Capacity	80 x (7/9Ah)	240 x (7/9Ah)	320 x (7/9Ah) or 80 x (28Ah)
H x W x D mm	1,315x510x815	1,980x510x815	1,980x730x815
Footprint	0.41 m ²	0.41 m ²	0.59 m ²



CumulusPower™

IM 10/20/25
UPS for External batteries

From 10kW
to 250kW



Modell	CP100-E-A1	CP150-E-A0	CP251-E-B0
Module Type	4 x IM10/IM20/IM25	6 x IM10/IM20/IM25	10 x IM10/IM20/IM25
Max Power	100kW	150kW	250kW
Batteries	External	External	External
H x W x D mm	1,315x510x815	1,980x510x815	1,980x730x815
Footprint	0.41 m ²	0.41 m ²	0.59 m ²

CumulusPower™

IM 10/20/25
19" Universal Rack

From 10kW
to 100kW



Modell	CAB-UR025-E-CO	CAB-UR050-E-CO	CAB-UR100-E-CO	Battery Shelf KIT
Module Type	1 x IM10/IM20/IM25	2 x IM10/IM20/IM25	4 x IM10/IM20/IM25	-
Batteries	External	External	External	1 x 40 (7/9ah)
Max Power	25 kW	50 kW	100 kW	-



Universal Rack
Frame

Universal Rack
Battery KIT

All Universal Racks include:

- Electrical distribution
- DC Battery MCB protection (1 x module)
- Bypass fuses (3 x module)
- Output parallel isolator (1 x module)
- System Manual Bypass
- Connectivity board (5x Dry output, 5x Dry Input, RS232, RS485, Bluetooth, Ethernet, Slot for SNMP)



CumulusPower™

IM 50/60

Bottom cable entry

From 50kW
to 3.6MW



Modell	CP250-E-B0	CP300-E-B0	CP600-E-2B0
Module Type	5 x IM50	5 x IM50/IM60	10 x IM50/IM60
Max Power	250kW	300kW	600kW
Batteries	External	External	External
H x W x D mm	1,980x730x845	1,980x730x845	1,980x1,460x845
Footprint	0.61 m ²	0.61 m ²	1.19m ²

CumulusPower™

IM 50/60

Top cable entry

From 50kW
to 3.6MW



Modell	CP300T-E-B0	CP600T-E-2B0
Module Type	5 x IM50/IM60	10 x IM50/IM60
Max Power	300kW	600kW
Batteries	External	External
H x W x D mm	1,980x730x845	1,980x1,460x845
Footprint	0.61 m ²	1.19 m ²

MODEL	CAB-CP050-I080-A1 CAB-CP050-I240-A0 CAB-UR050-E-C0	CAB-CP100-E-A1 CAB-CP100-I320-B0 CAB-UR100-E-C1	CAB-CP150-E-A0	CAB-CP251-E-B0
GENERAL DATA				
Module Type	IM10/IM20/IM25	IM10/IM20/IM25	IM10/IM20/IM25	IM10/IM20/IM25
Nominal power per module [kVA=kW]	10/20/25	10/20/25	10/20/25	10/20/25
Max Power per Frame [kVA=kW]	50	100	150	250
Number of modules per frame	1-2	1-4	1-6	1-10
Max power per system [kVA=kW]	1500	1500	1500	1500
Connection Type	Bottom	Bottom	Bottom	Bottom
Topology/Technology	Online double conversion/DARA (Distributed Active-redundant Architecture)			
INPUT				
MAINS				
Input Wiring	3Ph+N+PE			
Rated Voltage	380/400/415Vac			
Voltage Range	For loads <100% (-25%, +20%) <80% (-32.5%, +20%) <60% (-35%, +20%)			
Input Frequency	40-70 Hz			
Total Harmonic Distortion	THDi<3% for linear load, THDi<5% for nonlinear load			
Input Power Factor	0,99			
BYPASS				
Input Wiring	3Ph+N+PE			
Rated Voltage	360/400/420 Vac			
Input Frequency	50/60 ±2/4% (selectable)			
BATTERY				
Rated Voltage	360-480 Vdc (the number of batteries can be selected)			
Internal Batteries (7/9Ah)	I080: 80 I240: 240	E External I320: 320	E External	E External
Type	Lead-Acid/NiCad/Lithium			
Blocks [LA]/Cells[NiCad]	20-50 IM20/IM25: 30-50			
Charger (Amp/module)	20			
OUTPUT				
INVERTER				
Output Wiring	3Ph+N+PE			
Voltage	380/400/415 Vac±1%			
Frequency	Tracking the bypass input (Online Mode)			
Waveform	Sine wave (THDv<1% for linear load THDv<3% for non-linear load)			
Output Power Factor	1			
Efficiency	97,1%			
Overload Capacity	Inverter 124% continuous 125% overload for 10 min 150% overload for 1 min Bypass 135% overload for long term <1000% overload for 100ms			
Short circuit capability	3 x IN			
BYPASS				
Efficiency	99,4%			
ENVIRONMENT				
Operating Temperature	0-40°C (No power derating)			
Storage Temperature	-40-70°C			
Relative Humidity	0%-95% (No condensing)			
Maximum Operating Altitude	1000 m. Above 1000 m, derating 1% for each additional 100 m			
Audible Noise	< 65dB			
OTHERS				
Dimensions (H x W x D) [mm]	1,315x510x815 1,980x510x815	1,315x510x815 1,980x730x815	1,980x510x815	1,980x730x815
Weight [Kg] withouth modules	125 180	107 225	148	210
Certifications	EN/IEC 62040-1 EN/IEC 62040-2 EN/IEC 62040-3 CE RoHS			
Communications	Basic RS485 RS232 2 Dry Input. Pro Basic + Dry contacts Ethernet Bluetooth			

MODEL	CAB-CP250-E-B0	CAB-CP300-E-B0 CAB-CP300T-E-B0	CAB-CP600-E-D0 CAB-CP600T-E-2B0
GENERAL DATA			
Module Type	IM50	IM50/IM60	IM50/IM60
Nominal power per module [kVA=kW]	50	50/60	50/60
Max Power per Frame [kVA=kW]	250	300	600
Number of modules per frame	1-5	1-5	1-10
Max power per system [kVA=kW]	3000	3600	3600
Connection Type	Bottom	Bottom / Top	Bottom / Top
Topology/Technology	Online double conversion/DARA (Distributed Active-redundant Architecture)		
INPUT			
MAINS			
Input Wiring	3Ph+N+PE		
Rated Voltage	380/400/415Vac		
Voltage Range	For loads <100% (-25%, +20%) <80% (-32.5%, +20%) <60% (-35%, +20%)		
Input Frequency	40-70 Hz		
Total Harmonic Distortion	THDi<3% for linear load, THDi<5% for nonlinear load		
Input Power Factor	0,99		
BYPASS			
Input Wiring	3Ph+N+PE		
Rated Voltage	360/400/420 Vac		
Input Frequency	50/60 ±2/4% (selectable)		
BATTERY			
Rated Voltage	360-480 Vdc (the number of batteries can be selected)		
Internal Batteries (7/9Ah)	E External		
Type	Lead-Acid/NiCad/Lithium		
Blocks [LA]/Cells[NicAd]	20-50 IM50/IM60: 30-50		
Charger (Amp/module)	40		
OUTPUT			
INVERTER			
Output Wiring	3Ph+N+PE		
Voltage	380/400/415 Vac±1%		
Frequency	Tracking the bypass input (Online Mode) 50/60 Hz±0,05% (Battery Mode)		
Waveform	Sine wave (THDv<1% for linear load THDv<3% for non-linear load)		
Output Power Factor	1		
Efficiency	97,1%		
Overload Capacity	Inverter 124% continuous 125% overload for 10 min 150% overload for 1 min Bypass 135% overload for long term <1000% overload for 100ms		
Short circuit capability	3 x IN		
BYPASS			
Efficiency	99,4%		
ENVIRONMENT			
Operating Temperature	0-40°C (No power derating)		
Storage Temperature	-40-70°C		
Relative Humidity	0%-95% (No condensing)		
Maximum Operating Altitude	1000 m. Above 1000 m, derating 1% for each additional 100 m		
Audible Noise	< 65dB		
OTHERS			
Dimensions (H x W x D) [mm]	1,980x730x845	1,980x730x845	1,980x1,460x845
Weight [Kg] withouth modules	-	209	396
Certifications	EN/IEC 62040-1 EN/IEC 62040-2 EN/IEC 62040-3 CE RoHS		
Communications	Basic RS485 RS232 2 Dry Input. Pro Basic + Dry contacts Ethernet Bluetooth		

centiel
continuous power availability

CumulusPower™



Centiel HQ

Centiel SA
Via alla Stampa 5a
Cadro, Lugano CH6965
Switzerland
+41 91-2103683
write@centiel.com

Centiel UK

Centiel UK Ltd.
Faraday House
Caker Stream Road
Alton, GU34 2QF
United Kingdom
+44 1420 82031
sales@centiel.co.uk

Centiel Asia Pacific

Centiel Asia Pacific PTE Ltd.
10 Kaki Bukit Avenue 1 #05-01
Singapore 417924
write@centiel.com



www.centiel.com
www.centiel.co.uk